

TEST REPORT EN 61010-1 Safety requirements for electrical equipment for measurement, control, and laboratory use Part 1: General requirements EN 61010-2-030 Safety requirements for electrical equipment for measurement, control, and laboratory use Part 2-030: Particular requirements for testing and measuring circuits	
Report Number	170901032GZU-002
Date of issue	13 Nov 2017 Modification 1: 14 Jan 2019
Total number of pages	45
Applicant's name	Uni-Trend Technology(China)Co.,Ltd
Address	No. 6, Gong Ye Bei 1st Road, Songshan Lake National High-Tech Industrial Development Zone, DONGGUAN Guangdong Province 523808 CHINA
Test specification:	
Standard	EN 61010-1:2010, EN 61010-2-030:2010
Test procedure	LVD
Non-standard test method	N/A
Test Report Form No.	TTRF_EN61010_2_030A
Test Report Form(s) Originator	Intertek
Master TRF	2011-09
Test item description	
	Palm Size Multimeter
Trade Mark	UNI-T
Manufacturer	Uni-Trend Technology(China)Co.,Ltd
	No. 6, Gong Ye Bei 1st Road, Songshan Lake National High-Tech Industrial Development Zone, DONGGUAN Guangdong Province 523808 CHINA
Model/Type reference	UT131A, UT131B, UT131C, UT131D
Ratings	Battery operation: 1.5VX2 AAA battery
	Measurement category: CAT II 250 V


Testing procedure and testing location:		
<input checked="" type="checkbox"/>	Testing Laboratory:	Intertek Testing Services Shenzhen Ltd. Guangzhou Branch
Testing location/ address..... :		Block E, No.7-2 Guang Dong Software Science Park, Caipin Road, Guangzhou Science City, GETDD, Guangzhou, China
<input type="checkbox"/>	Associated Laboratory:	N/A
Testing location/ address..... :		
Tested by (name + signature + function)..... :		Bin Zhong /Engineer
Approved by (name + signature + function)..... :		Justin He /Manager
<input type="checkbox"/>	Testing procedure: TMP	N/A
Testing location/ address..... :		
Tested by (name + signature)		
Approved by (name + signature) ..		
<input type="checkbox"/>	Testing procedure: WMT	N/A
Testing location/ address..... :		
Tested by (name + signature)		
Witnessed by (name + signature) ..		
Approved by (name + signature) ..		

List of Attachments (including a total number of pages in each attachment - Table 1):		
Document No.	Documents included / attached to this report (description)	Page Numbers
Appendix 1	Product photos	8
<p>Summary of testing: The equipment covered by this report complies with the requirements of the standard EN 61010-1:2010:2010 and EN 61010-2-030:2010</p>		
<p>Test Report History: This report may consist of more than one report and is valid only with additional or previous issued reports:</p>		
Ref. No.	Item	
None		
<p>Tests performed (name of test and test clause): All applicable clauses performed</p>		<p>Testing location: Intertek Testing Services Shenzhen Ltd. Guangzhou Branch Block E, No.7-2 Guang Dong Software Science Park, Caipin Road, Guangzhou Science City, GETDD, Guangzhou, China</p>



Copy of marking plate

The artwork below may be only a draft. The use of certification marks on a product must be authorized by the respective NCBs that own these marks.

1). Markings on the battery compartment

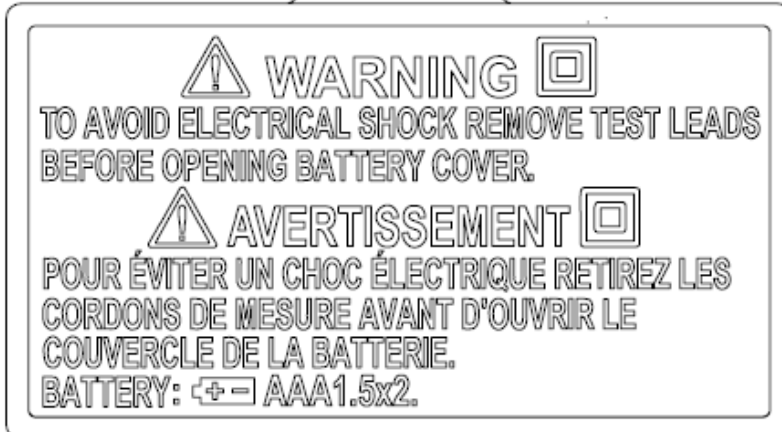

2). Markings on the rear enclosure

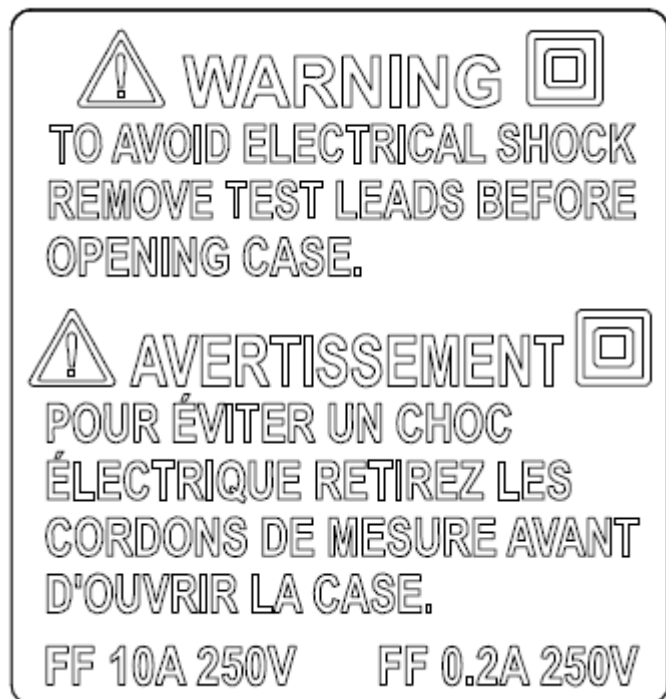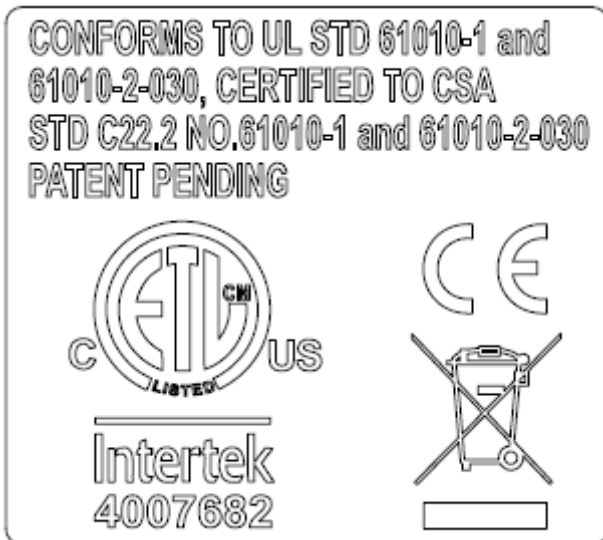

Remark: The rear marking of UT131A, UT131B, UT131C, UT131D are the same.

3) Markings on the front enclosure



UT131A



UT131B



UT131C



UT131D

Test item particulars:

Type of item : Measurement

Description of equipment function : Measure: AC/DC Voltage, AC/DC Current, Resistance, Temperature, Battery Test, Diode Test, NCV and Continuity.

Connection to MAINS supply : None

Measurement category : CAT II 250 V

POLLUTION DEGREE : 2

Means of protection..... : Class II (isolated)

Environmental conditions : Extended (Specify): 0 – 40 °C

For use in wet locations : No

Equipment mobility : Portable

Operating conditions : Continuous

Overall size of equipment (W x D x H) : 134mm x 77mm x 47mm

Mass of equipment (kg) : 0.206(battery included)

Marked degree of protection to IEC 60529 : N/A

Possible test case verdicts:

- Test case does not apply to the test object : N/A
- Test object does meet the requirement..... : P (Pass)
- Test object does not meet the requirement : F (Fail)

Testing:

Date of receipt of test item : 25 Oct 2017

Date (s) of performance of tests : 25 Oct 2017 – 10 Nov 2017

General remarks:

The test results presented in this report relate only to the object tested.
 This report shall not be reproduced, except in full, without the written approval of the Issuing testing laboratory.

"(see ENCLOSURE #)" refers to additional information appended to the report.

"(see Form A.xx)" refers to a table appended to the report.

Bottom lines for measurement tables Form A.xx are optional if used as record.

Throughout this report a comma / point is used as the decimal separator.

When determining the test conclusion, the Measurement Uncertainty of test has been considered.

This report is for the exclusive use of Intertek's Client and is provided pursuant to the agreement between Intertek and its Client. Intertek's responsibility and liability are limited to the terms and conditions of the agreement. Intertek assumes no liability to any party, other than to the Client in accordance with the agreement, for any loss, expense or damage occasioned by the use of this report. Only the Client is authorized to permit copying or distribution of this report and then only in its entirety. Any use of the Intertek name or one of its marks for the sale or advertisement of the tested material, product or service must first be approved in writing by Intertek. The observations and test results in this report are relevant only to the sample tested. This report by itself does not imply that the material, product, or service is or has ever been under an Intertek certification program.

The test report only allows to be revised only within the report defined retention period unless standard or regulation was withdrawn or invalid.

Modification 1: This report based on and superseded original report 170901032GZU-002, dated 13 Nov 2017, with below modified information:

1. Change applicant and manufacturer name from "Uni-Trend Technology(China) Ltd" to "Uni-Trend Technology(China)Co.,Ltd"
2. Updated Photo 9 - Photo16, since some components is deleted detail see below. PCB layout is changed. No additional test required.

model [Ⓜ]	components [Ⓜ]
UT131A [Ⓜ]	C14·C15·L1 [Ⓜ]
UT131B [Ⓜ]	C13·C14·L1 [Ⓜ]
UT131D [Ⓜ]	C13·C14·L1 [Ⓜ]

General product information:

The palm size multimeter a manual meter. It can measure AC/DC Voltage, AC/DC Current, Resistance, Temperature, Battery test, Diode test, NCV and Continuity.

It is not intended for mains circuit measurement.

The special feature of each model are as follows:

UT131A: 2mF capacitance test function

UT131B: Battery test with status indicators

UT131C: Temperature test

UT131D: NCV test

More model differences are as follows:

UT131 Serial					
	Type No.	UT131A	UT131B	UT131C	UT131D
Features					
Count number		2000	2000	2000	2000
Conversion rate		3.0/s	3.0/s	3.0/s	3.0/s
RANGE change		Auto	Manual	Manual	Manual
Voltage measure		O	O	O	O
Voltage True RMS		X	X	X	X
Current measure		O	O	O	O
Capacitor measure		O	X	X	X
Resistance measure		O	O	O	O
Continuity check		O	O	O	O
Temperature measure		X	X	O	X
Hz Measure		X	X	X	X
MAX/MIN mode		X	X	X	X
HOLD mode		O	O	O	O
REL mode		O	X	X	X
NCV		X	X	X	O

O indicates the meter has the function.

X indicates the meter does not have the function.

EN 61010-1 / EN 61010-2-030			
Clause	Requirement + Test	Result - Remark	Verdict
4.4	Testing in SINGLE FAULT CONDITIONS		P
4.4.1	Fault tests		P
4.4.2	Application of SINGLE FAULT CONDITIONS		P
4.4.2.1	SINGLE FAULT CONDITIONS not covered by 4.4.2.2 to 4.4.2.14		—
4.4.2.2	PROTECTIVE IMPEDANCE		N/A
4.4.2.3	PROTECTIVE CONDUCTOR	Class II equipment	N/A
4.4.2.4	Equipment or parts for short-term or intermittent operation		N/A
4.4.2.5	Motors	No motor	N/A
	– stopped while fully energized		N/A
	– prevented from starting		N/A
	– one phase interrupted (multi-phase)		N/A
4.4.2.6	Capacitors		N/A
4.4.2.7	MAINS transformers	No mains transformer	N/A
4.4.2.7.2	Short circuit		N/A
4.4.2.7.3	Overload		N/A
4.4.2.8	Outputs		N/A
4.4.2.9	Equipment for more than one supply		N/A
4.4.2.10	Cooling	No cooling	N/A
	– air holes closed		N/A
	– fans stopped		N/A
	– coolant stopped		N/A
	– loss of cooling liquid		N/A
4.4.2.11	Heating devices	No heating device	N/A
	– timer overridden		N/A
	– temperature controller overridden		N/A
4.4.2.12	Insulation between circuits and parts		N/A
4.4.2.13	Interlocks	No interlock	N/A
4.4.2.14	Voltage selectors	Only one type battery evaluated in this report.	N/A
4.4.3	Duration of tests		—
4.4.4	Conformity after application of fault conditions		P
5	MARKING AND DOCUMENTATION		P
5.1.1	Required equipment markings		P
	- Visible from the exterior; or		P

EN 61010-1 / EN 61010-2-030			
Clause	Requirement + Test	Result - Remark	Verdict
	- Visible after removing cover or opening door		N/A
	- Visible after removal from a rack or panel		N/A
	Not put on parts which can be removed by an operator		P
	Letter symbols (IEC 60027) used		P
	Graphic symbols (IEC 61010-1: Table 1) used		P
5.1.2	Identification		—
	Equipment is identified by:		P
	a) Manufacturer's or supplier's name or trademark	UNI-T	P
	b) Model number, name or other means	UT131A, UT131B, UT131C, UT131D	P
	Manufacturing location identified	Only one factory	N/A
5.1.3	MAINS supply	Powered by internal battery	N/A
	Equipment is marked as follows:		N/A
	a) Nature of supply:		—
	1) a.c. RATED MAINS frequency or range of frequencies		N/A
	2) d.c. with symbol 1		N/A
	b) RATED supply voltage(s) or range		N/A
	c) Max. RATED power (W or VA) or input current.... :		N/A
	The marked value not less than 90 % of the maximum value		N/A
	If more than one voltage range:		—
	Separate values marked; or		N/A
	Values differ by less than 20 %		N/A
	d) OPERATOR-set for different RATED supply voltages:		—
	Indicates the equipment set voltage		N/A
	Portable equipment indication is visible from the exterior		N/A
	Changing the setting changes the indication		N/A
	e) Accessory MAINS socket-outlets accepting standard MAINS plugs are marked:		N/A
	With the voltage if it is different from the MAINS supply voltage		N/A
	For use only with specific equipment		N/A
	If not marked for specific equipment it is marked with:		N/A
	The maximum rated current or power; or		N/A

EN 61010-1 / EN 61010-2-030			
Clause	Requirement + Test	Result - Remark	Verdict
	Symbol 14 with full details in the documentation		N/A
5.1.4	Fuses		P
	Operator replaceable fuse marking (see also 5.4.5)	Mark on PCB beside fuse holders	P
5.1.5	TERMINALS, connections and operating devices		P
5.1.5.1	General		P
	Where necessary for safety, indication of purpose of TERMINALS, connectors, controls and indicators marked		P
	If insufficient space, symbol 14 used		N/A
	Push-buttons and actuators of emergency stop devices and indicators:		—
	used only to indicate a warning of danger or		N/A
	the need for urgent action		N/A
	coloured red		N/A
	coded as specified in IEC 60073		N/A
	Supplementary means of coding provided, if meaning of colour relates (see IEC 60073):		N/A
	to safety of persons; or		N/A
	safety of the environment		N/A
5.1.5.2	TERMINALS		N/A
	MAINS supply TERMINAL identified	Powered by internal battery	N/A
	Other TERMINAL marking:		N/A
	a) FUNCTIONAL EARTH TERMINALS (symbol 5 used)		N/A
	b) PROTECTIVE CONDUCTOR TERMINALS:		N/A
	Symbol 6 is placed close to or on the TERMINAL; or		N/A
	Part of appliance inlet		N/A
	c) TERMINALS of control circuits (symbol 7 used)		N/A
	d) HAZARDOUS LIVE TERMINALS supplied from the interior		N/A
	Standard MAINS socket outlet; or		N/A
	RATINGS marked; or		N/A
	Symbol 14 used		N/A
5.1.5.101	Measuring circuit TERMINALS		P
5.1.5.101.1	a) mark the RATED voltage to earth	Rated 250VMAX	P
	b) mark the RATED voltage or the RATED current, as applicable, of each pair or set	See copy of marking	P

EN 61010-1 / EN 61010-2-030			
Clause	Requirement + Test	Result - Remark	Verdict
	<i>c) the pertinent MEASUREMENT CATEGORY for each pair or set of measuring circuit TERMINALS or symbol 14 of Table 1</i>		P
	<i>Symbol 14 of Table 1 shall be marked if current measuring TERMINALS are not intended for connection to current transformers without internal protection</i>		P
	<i>Markings shall be placed adjacent to the TERMINALS. or on the RATING plate or scale plate</i>	See copy of marking plate	P
5.1.5.101.2	<i>Measuring circuit TERMINALS RATED for MEASUREMENT CATEGORIES II, III or IV</i>	CAT II 250V	P
5.1.5.101.3	<i>Measuring circuit TERMINALS RATED for connection to voltages above the level of 6.3.1</i>		N/A
5.1.5.101.4	<i>Low voltage, permanently connected, or dedicated measuring circuit TERMINALS</i>		N/A
5.1.6	Switches and circuit breakers	No switch or circuit breaker	N/A
	If disconnecting device, off position clearly marked		N/A
	If push-button used as power supply switch:		N/A
	Symbol 9 and 15 used for on-position		N/A
	Symbol 10 and 16 used for off-position		N/A
	Pair of symbols 9, 15 and 10, 16 close together		N/A
5.1.7	Equipment protected by DOUBLE INSULATION or REINFORCED INSULATION		P
	Protected throughout (symbol 11 used)	symbol 11 used	P
	Only partially protected (symbol 11 not used)		N/A
5.1.8	Field-wiring TERMINAL boxes	No such box	N/A
	If TERMINAL or ENCLOSURE exceeds 60 °C:		N/A
	Cable temperature RATING marked		N/A
	Marking visible before and during connection or beside TERMINAL		N/A
5.2	Warning markings		P
	Visible when ready for NORMAL USE		P
	Are near or on applicable parts		N/A
	Symbols and text correct dimensions and colour:		—
	a) symbols min 2,75 mm and text 1,5 mm high and contrasting in colour with background		P
	b) symbols and text moulded, stamped or engraved in material min. 2,0 mm high and		P
	0,5 mm depth or raised if not contrasting in colour		P
	If necessary marked with symbol 14		P

EN 61010-1 / EN 61010-2-030			
Clause	Requirement + Test	Result - Remark	Verdict
	Statement to isolate or disconnect if access by using a tool to HAZARDOUS LIVE parts is permitted		P
5.3	Durability of markings		P
	The required markings remain clear and legible in NORMAL USE	(see Form A.3)	P
5.4	Documentation		P
5.4.1	General		P
	Equipment is accompanied by documentation for safety purposes for OPERATOR or RESPONSIBLE BODY		P
	Safety documentation for service personnel authorized by the manufacturer		P
	Documentation necessary for safe operation is provided in printed media or	Hard copy of user manual in English is provided	P
	in electronic media if available at any time		N/A
	Documentation includes:		—
	a) intended use		P
	b) technical specification		P
	c) name and address of manufacturer or supplier		P
	d) information specified in 5.4.2 to 5.4.6		P
	e) information to mitigate residual RISK (see also subclause 17)		N/A
	f) accessories for safe operation of the equipment specified		N/A
	g) guidance provided to check correct function of the equipment, if incorrect reading may cause a HAZARD from harmful or corrosive substances of HAZARDOUS live parts		P
	h) instructions for lifting and carrying	Weight less than 18kg	N/A
	aa) information about each relevant MEASUREMENT CATEGORY		P
	bb) a warning not to use the equipment for measurements on MAINS CIRCUITS if not intend for any measurement category	The equipment is intended for CAT II measure.	N/A
	Warning statements and a clear explanation of warning symbols:		—
	Provided in the documentation; or		P
	Information is marked on the equipment		P
5.4.2	Equipment ratings		P
	Documentation includes:		—
	a) Supply voltage or voltage range	1.5VX2 AAA battery	P
	Frequency or frequency range.....	DC battery operation	N/A

EN 61010-1 / EN 61010-2-030			
Clause	Requirement + Test	Result - Remark	Verdict
	Power or current rating		N/A
	b) Description of all input and output connections in accordance to 6.6.1 a)		N/A
	c) RATING of insulation of external circuits in accordance to 6.6.1 b)		P
	d) Statement of the range of environmental conditions (see 1.4)		P
	e) Degree of protection (IEC 60529)	No announced	N/A
	f) if impact rating less than 5 J:	Tested at 5J	N/A
	IK code in accordance to IEC 62262 marked or		N/A
	symbol 14 of table 1 marked, with		N/A
	RATED energy level and test method stated		N/A
5.4.3	Equipment installation	A portable equipment	N/A
	Documentation includes instructions for:		N/A
	a) assembly, location and mounting requirements		N/A
	b) protective earthing		N/A
	c) connections to supply		N/A
	d) PERMANENTLY CONNECTED EQUIPMENT:		N/A
	1) Supply wiring requirements		N/A
	2) If external switch or circuit-breaker, requirements and location recommendation		N/A
	e) ventilation requirements		N/A
	f) special services (e. g. air, cooling liquid)		N/A
	g) instructions relating to sound level		N/A
	aa) for permanently connected measuring circuit TERMINALS RATED for MEASUREMENT CATEGORIES II, III or IV		N/A
	bb) for permanently connected measuring circuit TERMINALS that are not RATED for MEASUREMENT CATEGORIES II, III or IV		N/A
5.4.4	Equipment operation		P
	Instructions for use include:		P
	a) identification and description of operating controls		P
	b) positioning for disconnection		N/A
	c) instructions for interconnection		P
	d) specification of intermittent operation limits	Continuous operation for the equipment	N/A
	e) explanation of symbols used		P

EN 61010-1 / EN 61010-2-030			
Clause	Requirement + Test	Result - Remark	Verdict
	f) replacement of consumable materials	Battery	P
	g) cleaning and decontamination		N/A
	h) listing of any poisonous or injurious gases and quantities	No poisonous or injurious gases substance	N/A
	i) RISK reduction procedures relating to flammable liquids (see 9.5)		N/A
	j) RISK reduction procedures relating burn from surfaces permitted to exceed limits of 10.1		N/A
	Additional precautions for IEC 60950 conforming equipment in regard to moistures and liquids		N/A
	A statement about protection impairment if used in a manner not specified by the manufacturer		P
5.4.5	Equipment maintenance and Service		P
	Instructions for RESPONSIBLE BODY include:		—
	Instructions sufficient in detail permitting safe maintenance and inspection and continued safety:		P
	Instruction against the use of detachable MAINS supply cord with inadequate rating		N/A
	Specific battery type of user replaceable batteries	1.5VX2 AAA battery	P
	Any manufacturer specified parts		N/A
	Rating and characteristics of fuses		P
	Instructions include following subjects permitting safe servicing and continued safety:		N/A
	a) product specific RISKS may affect service personnel		N/A
	b) protective measures for these RISKS		N/A
	c) verification of the safe state after repair		N/A
5.4.6	Integration into systems or effects resulting from special conditions		N/A
	Aspects described in documentation		N/A

6	PROTECTION AGAINST ELECTRIC SHOCK		P
6.1	General		P
6.1.1	Requirements		—
6.1.2	Exceptions		N/A
	<i>aa) locking or screw-held type measuring TERMINALS, including TERMINALS which do not require the use of a TOOL</i>		N/A
6.2	Determination of ACCESSIBLE parts		P
6.2.1	General		P

EN 61010-1 / EN 61010-2-030			
Clause	Requirement + Test	Result - Remark	Verdict
	Unless obviously determination of ACCESSIBLE parts as specified in 6.2.2 to 6.2.4		P
6.2.2	Examination		P
	- with jointed test finger (as specified B.2)		P
	- with rigid test finger (as specified B.1) and a force of 10 N		P
6.2.3	Openings above parts that are HAZARDOUS LIVE	No opening	N/A
	- test pin with length of 100 mm and 4 mm in diameter applied		N/A
6.2.4	Openings for pre-set controls	No opening	N/A
	- test pin with length of 100 mm and 3 mm in diameter applied		N/A
6.3	Limit values for ACCESSIBLE parts		P
6.3.1	Levels in NORMAL CONDITION	Max voltage: 40.15V peak, 27.42V rms	P
6.3.2	Levels in SINGLE FAULT CONDITION	Max voltage: 41.38V peak, 28.31V rms	P
6.4	Primary means of protection		P
	a) ENCLOSURES or PROTECTIVE BARRIERS (see 6.4.2)		P
	b) BASIC INSULATION (see 6.4.3)		P
	c) Impedance (see 6.4.4)		N/A
6.5	Additional means of protection in case of SINGLE FAULT CONDITION		P
6.5.1	ACCESSIBLE parts are prevented from becoming HAZARDOUS live by the primary means of protection and supplemented by one of:		P
	a) PROTECTIVE BONDING (see 6.5.2)		N/A
	b) SUPPLEMENTARY INSULATION (see 6.5.3)		N/A
	c) automatic disconnection of the supply (see 6.5.5)		N/A
	d) current- or voltage-limiting device (see 6.5.6)		N/A
	Alternatively one of the single means of protection is used:		P
	e) REINFORCED INSULATION (see 6.5.3)		P
	f) PROTECTIVE IMPEDANCE (see 6.5.4)		N/A
6.5.2	PROTECTIVE BONDING	A class II equipment	N/A
6.5.2.1	ACCESSIBLE conductive parts, may become HAZARDOUS LIVE in SINGLE FAULT CONDITION:		N/A
	Bonded to the PROTECTIVE CONDUCTOR TERMINAL; or		N/A
	Separated by conductive screen or barrier bonded to PROTECTIVE CONDUCTOR TERMINAL		N/A

EN 61010-1 / EN 61010-2-030			
Clause	Requirement + Test	Result - Remark	Verdict
6.5.2.2	Integrity of PROTECTIVE BONDING		N/A
	a) PROTECTIVE BONDING consists of directly connected structural parts or discrete conductors or both; and withstands thermal and dynamic stresses		N/A
	b) Soldered connections:		N/A
	Independently secured against loosening		N/A
	Not used for other purposes		N/A
	c) Screw connections are secured		N/A
	d) PROTECTIVE BONDING not interrupted; or		N/A
	exempted as removable part carries MAINS SUPPLY input connection		N/A
	e) Any movable PROTECTIVE BONDING connection specifically designed, and meets 6.5.2.4		N/A
	f) No external metal braid of cables used (not regarded as PROTECTIVE BONDING)		N/A
	g) IF MAINS SUPPLY passes through:		N/A
	Means provided for passing protective conductor;		N/A
	Impedance meets 6.5.2.4		N/A
	h) Protective conductors bare or insulated, if insulated, green/yellow		N/A
	Exceptions:		N/A
	1) earthing braids;		N/A
	2) internal protective conductors etc.;		N/A
	Green/yellow not used for other purposes		N/A
	TERMINAL suitable for connection of a PROTECTIVE CONDUCTOR, and meets 6.5.2.3		N/A
6.5.2.3	PROTECTIVE CONDUCTOR TERMINAL		N/A
	a) Contact surfaces are metal		N/A
	b) Appliance inlet used		N/A
	c) For rewirable cords and PERMANENTLY CONNECTED EQUIPMENT, PROTECTIVE CONDUCTOR TERMINAL is close to MAINS supply TERMINALS		N/A
	d) If no MAINS supply is required, any PROTECTIVE CONDUCTOR TERMINAL:		N/A
	Is near terminals of circuit for which protective earthing is necessary		N/A
	External if other terminals external		N/A
	e) Equivalent current-carrying capacity to MAINS supply TERMINALS		N/A

EN 61010-1 / EN 61010-2-030			
Clause	Requirement + Test	Result - Remark	Verdict
	f) If plug-in, makes first and breaks last		N/A
	g) If also used for other bonding purposes, PROTECTIVE CONDUCTOR:		N/A
	Applied first;		N/A
	Secured independently;		N/A
	Unlikely to be removed by servicing		N/A
	h) PROTECTIVE CONDUCTOR of measuring circuit:		N/A
	1) Current RATING equivalent to measuring circuit TERMINAL;		N/A
	2) PROTECTIVE BONDING:		N/A
	Not interrupted; or		N/A
	i) FUNCTIONAL EARTH TERMINALS allow independent connection		N/A
	j) If a binding screw used for PROTECTIVE CONDUCTOR TERMINAL:		N/A
	Suitable size for bond wire		N/A
	Not smaller than M 4		N/A
	At least 3 turns of screw engaged		N/A
	Passes tightening torque test		N/A
	k) Contact pressure not capable being reduced by deformation of materials		N/A
6.5.2.4	Impedance of PROTECTIVE BONDING of plug-connected equipment		N/A
	Impedance between PROTECTIVE CONDUCTOR TERMINAL and each ACCESSIBLE part where PROTECTIVE BONDING is specified, is:		—
	less than 0,1 Ohm; or		N/A
	less than 0,2 Ohm if equipment is provided with non detachable cord		N/A
6.5.2.5	Bonding impedance of PERMANENTLY CONNECTED EQUIPMENT		N/A
6.5.2.6	Transformer PROTECTIVE BONDING screen		N/A
	Transformer provided with screen for PROTECTIVE BONDING:		N/A
	screen bonding consists of directly connected structural parts or discrete conductors or both; and withstands thermal and dynamic stresses (see 6.5.2.2 a)		N/A
	screen bonding with soldered connection (see 6.5.2.2 b) is:		N/A
	- Independently secured against loosening		N/A

EN 61010-1 / EN 61010-2-030			
Clause	Requirement + Test	Result - Remark	Verdict
	- Not used for other purposes		N/A
6.5.2.101	<i>Indirect bonding for testing and measuring circuits</i>		N/A
6.5.3	SUPPLEMENTARY and REINFORCED INSULATION		P
	Meet CLEARANCE, CREEPAGE DISTANCE and solid insulation requirements of 6.7		P
6.5.4	PROTECTIVE IMPEDANCE	No protective impedance	N/A
	Limits current or voltage to level of 6.3.1 in NORMAL and to level of 6.3.2 in SINGLE FAULT CONDITION		N/A
	CLEARANCE, CREEPAGE DISTANCE between terminations of the impedance meet requirements of DOUBLE or REINFORCED INSULATION of 6.7		N/A
	The PROTECTIVE IMPEDANCE consists of one or more of the following:		—
	a) appropriate single component suitable for safety and reliability for protection, it is:		N/A
	1) RATED twice the maximum WORKING VOLTAGE		N/A
	2) resistor RATED for twice the power dissipation for maximum WORKING VOLTAGE		N/A
	b) combination of components		N/A
	Single electronic device not used as PROTECTIVE IMPEDANCE		N/A
6.5.5	Automatic disconnection of the supply	Internally battery operation	N/A
6.5.6	Current- or voltage-limiting devices		N/A
6.6	Connections to external circuits		P
6.6.1	Connections do not cause ACCESSIBLE parts of the following to become HAZARDOUS LIVE in NORMAL CONDITION or SINGLE FAULT CONDITION:		P
	- the external circuits		P
	- the equipment		P
	Protection achieved by separation of circuits; or		P
	short circuit of separation does not cause a HAZARD		N/A
	Instructions or markings for each terminal include:		P
	a) RATED conditions for TERMINAL		P
	b) Required RATING of external circuit insulation		N/A
6.6.2	TERMINALS for external circuits	No such terminal	N/A
	TERMINALS which receive a charge from an internal capacitor are not HAZARDOUS LIVE after 10 s of interrupting supply connection		N/A
6.6.3	Circuits with terminals which are HAZARDOUS LIVE		N/A
	These circuits are:		N/A

EN 61010-1 / EN 61010-2-030			
Clause	Requirement + Test	Result - Remark	Verdict
	Not connected to ACCESSIBLE conductive parts; or		N/A
	Connected to ACCESSIBLE conductive parts, but are not MAINS CIRCUITS and have one TERMINAL contact at earth potential		N/A
	No ACCESSIBLE conductive parts are HAZARDOUS LIVE		N/A
6.6.4	ACCESSIBLE terminals for stranded conductors	No such terminal	N/A
	No RISK of accidental contact because:		N/A
	Located or shielded		N/A
	Self-evident or marked whether or not connected to ACCESSIBLE conductive parts		N/A
	ACCESSIBLE TERMINALS will not work loose		N/A
6.6.101	<i>Measuring circuit TERMINALS</i>		P
	<i>Conductive parts of each unmated measuring circuit TERMINAL which could become HAZARDOUS LIVE when the maximum RATED voltage is applied to other measuring circuit TERMINALS on the equipment shall be separated by at least the CLEARANCE and CREEPAGE DISTANCE of Table 101 from the closest approach of the test finger touching the external parts of the TERMINAL in the least favourable position.</i>	Limit of clearance and creepage distance: 2,6mm Measured value: 4.6mm	P
6.6.102	<i>Specialized measuring circuit TERMINALS</i>		N/A
6.7	Insulation requirements	See appended table	P
6.8	Procedure for dielectric strength tests	See appended table	P
6.9	Constructional requirements for protection against electric shock		P
6.9.1	If a failure could cause a HAZARD:		P
	a) Security of wiring connections		P
	b) Screws securing removable covers		P
	c) Accidental loosening		P
	d) CLEARANCES and CREEPAGE DISTANCES not reduced below the values of basic insulation by loosening of parts or wires		P
6.9.2	Insulating materials		P
	Material not to be used for safety relevant insulation:		P
	a) Easily damaged materials not used		P
	b) Non-impregnated hygroscopic materials not used		P
6.9.3	Colour coding		N/A
	Green-and-yellow insulation shall not be used except:	Not Green-and-yellow insulation used	N/A
	a) protective earth conductors;		N/A

EN 61010-1 / EN 61010-2-030			
Clause	Requirement + Test	Result - Remark	Verdict
	b) PROTECTIVE BONDING conductors;		N/A
	c) potential equalization conductors;		N/A
	d) functional earth conductors		N/A
6.9.101	<i>Over-range indication</i>		P
6.10	Connection to MAINS supply source and connections between parts of equipment		N/A
6.10.1	MAINS supply cords	No mains supply cord due to internally battery operation	N/A
	RATED for maximum equipment current (see 5.1.3 c)		N/A
	Cable complies with IEC 60227 or IEC 60245		N/A
	Heat-resistant if likely to contact hot parts		N/A
	Temperature RATING (cord and inlet) :		N/A
	Green/yellow used only for connection to PROTECTIVE CONDUCTOR TERMINALS		N/A
	Detachable cords with IEC 60320 MAINS connectors:		—
	Conform to IEC 60799; or		N/A
	Have the current RATING of the MAINS connector		N/A
6.10.2	Fitting of non-detachable MAINS supply cords		N/A
6.10.2.1	Cord entry		N/A
	a) Inlet or bushing with a smoothly rounded opening; or		N/A
	b) Insulated cord guard protruding >5 D		N/A
6.10.2.2	Cord anchorage		N/A
	Protective earth conductor is the last to take the strain		N/A
	a) Cord is not clamped by direct pressure from a screw		N/A
	b) Knots are not used		N/A
	c) Cannot push the cord into the equipment to cause a HAZARD		N/A
	d) No failure of cord insulation in anchorage with metal parts		N/A
	e) Not to be loosened without a tool		N/A
	f) Cord replacement does not cause a HAZARD and method of strain relief is clear		N/A
	Push-pull and or torque test		N/A
6.10.3	Plugs and connectors		N/A
	MAINS supply plugs, connectors etc., conform with relevant specifications		N/A

EN 61010-1 / EN 61010-2-030			
Clause	Requirement + Test	Result - Remark	Verdict
	If equipment supplied at voltages below 6.3.2.a) or from a sole source:		—
	Plugs of supply cords do not fit MAINS sockets above rated SUPPLY voltage		N/A
	MAINS type plugs used only for connection to MAINS supply		N/A
	Plug pins which receive a charge from an internal capacitor		N/A
	Accessory MAINS socket outlets:		—
	a) Marking if accepts a standard MAINS supply plug (see 5.1.3e)		N/A
	b) Input has a protective earth conductor if outlet has EARTH TERMINAL CONTACT		N/A
6.11	Disconnection from supply source		N/A
6.11.1	Disconnects all current-carrying conductors		N/A
6.11.2	Exceptions		N/A
6.11.3	Requirements according to type of equipment		N/A
6.11.3.1	PERMANENTLY CONNECTED EQUIPMENT and multi-phase equipment		N/A
	Employs switch or circuit-breaker		N/A
	If switch or circuit-breaker is not part of the equipment, documentation requires:		—
	a) Switch or circuit-breaker to be included in building installation		N/A
	b) Suitable location easily reached		N/A
	c) Marking as disconnecting for the equipment		N/A
6.11.3.2	Single-phase cord-connected equipment		N/A
	Equipment is provided with one of the following:		N/A
	a) Switch or circuit-breaker		N/A
	b) Appliance coupler (disconnectable without tool)		N/A
	c) Separable plug (without locking device)		N/A
6.11.4	Disconnecting devices		N/A
6.11.4.1	Disconnecting device part of equipment		N/A
	Electrically close to the SUPPLY		N/A
	Power-consuming components not electrically located between the supply source and the disconnecting device		N/A
	Except electromagnetic interference suppression circuits permitted to be located on the supply side of the disconnecting device		N/A

EN 61010-1 / EN 61010-2-030			
Clause	Requirement + Test	Result - Remark	Verdict

6.11.4.2	Switches and circuit-breakers		N/A
	When used as disconnection device:		—
	Meets IEC 60947-1 and IEC 60947-3		N/A
	Marked to indicate function :		N/A
	Not incorporated in MAINS cord		N/A
	Does not interrupt PROTECTIVE EARTH CONDUCTOR		N/A
6.11.4.3	Appliance couplers and plugs		N/A
	Where an appliance coupler or separable plug is used as the disconnecting device (see 6.11.3.2):		N/A
	Readily identifiable and easily reached by the operator		N/A
	Single-phase portable equipment cord length not more than 3 m		N/A
	PROTECTIVE EARTH CONDUCTOR connected first and disconnected last		N/A

7	PROTECTION AGAINST MECHANICAL HAZARDS		P
7.1	Equipment does not cause a mechanical HAZARD in NORMAL nor in SINGLE FAULT CONDITION		P
	Conformity is checked by 7.2 to 7.7		P
7.2	Sharp edges		P
	Easily touched parts are smooth and rounded		P
	Do not cause injury during NORMAL USE and		P
	Do not cause injury during SINGLE FAULT CONDITION		P
7.3	Moving parts	No moving parts	N/A
7.4	Stability		P
7.5	Provisions for lifting and carrying	Weight less than 18kg	N/A
7.6	Wall mounting	A portable equipment	N/A
7.7	Expelled parts		N/A

8	RESISTANCE TO MECHANICAL STRESSES		P
8.1	Equipment does not cause a HAZARD when subjected to mechanical stresses in NORMAL USE		P
8.2	ENCLOSURE rigidity test		P
8.2.1	Static test		P
8.2.2	Impact test		P
8.3	Drop test		P

EN 61010-1 / EN 61010-2-030			
Clause	Requirement + Test	Result - Remark	Verdict
9	PROTECTION AGAINST THE SPREAD OF FIRE		P
9.1	No spread of fire in NORMAL and SINGLE FAULT CONDITION		P
	MAINS supplied equipment meets requirements of 9.6 additionally	Internally battery operation	N/A
	Conformity is checked by minimum one or a combination of the following (see Figure 11):		N/A
	a) SINGLE FAULT test of 4.4; or		P
	b) Application of 9.2 (eliminating or reducing the sources of ignition); or		N/A
	c) Application of 9.3 (containment of fire within the equipment)		P
9.2	Eliminating or reducing the sources of ignition within the equipment		N/A
9.3	Containment of the fire within the equipment, should it occur		P
9.4	Limited-energy circuit		N/A
9.5	Requirements for equipment containing or using flammable liquids	No containing or using flammable liquids	N/A
9.6	Overcurrent protection		N/A
9.6.1	MAINS supplied equipment protected	Internally battery operation for the equipment	N/A
	BASIC INSULATION between MAINS parts of opposite polarity provided		N/A
	Devices not in the protective conductor		N/A
	Fuses or single-pole circuit-breakers not fitted in neutral (multi-phase)		N/A
9.6.2	PERMANENTLY CONNECTED EQUIPMENT		N/A
	Overcurrent protection device:		N/A
	Fitted within the equipment; or		N/A
	Specified in manufacturer's instructions		N/A
9.6.3	Other equipment		N/A
	Protection within the equipment		N/A

10	EQUIPMENT TEMPERATURE LIMITS AND RESISTANCE TO HEAT		P
10.1	Surface temperature limits for protection against burns		P
10.2	Temperatures of windings		N/A
10.3	Other temperature measurements		P
10.4	Conduct of temperature tests		P

EN 61010-1 / EN 61010-2-030			
Clause	Requirement + Test	Result - Remark	Verdict

10.5	Resistance to heat		P
------	--------------------	--	---

11	PROTECTION AGAINST HAZARDS FROM FLUIDS		N/A
11.1	Protection to OPERATORS and surrounding area provided by EQUIPMENT		N/A
	All fluids specified by manufacturer considered	No fluid	N/A
11.2	Cleaning		N/A
11.3	Spillage		N/A
11.4	Overflow		N/A
11.5	Battery electrolyte		N/A
	Battery electrolyte leakage presents no HAZARD		N/A
11.6	Specially protected equipment		N/A
11.7	Fluid pressure and leakage		N/A

12	PROTECTION AGAINST RADIATION, INCLUDING LASER SOURCES, AND AGAINST SONIC AND ULTRASONIC PRESSURE		N/A
12.1	Equipment provides protection	No laser source	N/A
12.2	Equipment producing ionizing radiation		N/A
12.3	Ultraviolet (UV) radiation		N/A
12.4	Microwave radiation		N/A
12.5	Sonic and ultrasonic pressure		N/A
12.6	Laser sources		N/A

13	PROTECTION AGAINST LIBERATED GASES AND SUBSTANCES, EXPLOSION AND IMPLOSION		P
13.1	Poisonous and injurious gases and substances		N/A
13.2	Explosion and implosion		N/A
13.2.1	Components		N/A
13.2.2	Batteries and battery charging	No hazard during installing with incorrect polarity	P
13.2.3	Implosion of cathode ray tubes	No CRT	N/A

14	COMPONENTS AND SUBASSEMBLIES		P
14.1	Where safety is involved, components and subassemblies meet relevant requirements		P
14.2	Motors	No motor	N/A
14.2.1	Motor temperatures		N/A


EN 61010-1 / EN 61010-2-030			
Clause	Requirement + Test	Result - Remark	Verdict
	Does not present a HAZARD when stopped or prevented from starting; or		N/A
	Protected by over-temperature or thermal protection device conform with 14.3		N/A
14.2.2	Series excitation motors		N/A
	Connected direct to device, if overspeeding causes a HAZARD		N/A
14.3	Overtemperature protection devices	No overtemperature protection devices	N/A
	Devices operating in a SINGLE FAULT CONDITION		N/A
	a) Reliable function is ensured		N/A
	b) RATED to interrupt maximum current and voltage		N/A
	c) Does not operate in NORMAL USE		N/A
	If self-resetting device used to prevent a HAZARD, protected part requires intervention before restarting		N/A
14.4	Fuse holders		N/A
	No access to HAZARDOUS LIVE parts		N/A
14.5	MAINS voltage selecting devices		N/A
	Accidental change not possible		N/A
14.6	MAINS transformers tested outside equipment		N/A
14.7	Printed circuit boards		P
	Data shows conformity with V-1 of IEC 60695-11-10 or better; or	PCB has rated V-0	P
	Test shows conformity with V-1 of IEC 60695-11-10 or better		N/A
	Not applicable for printed wiring boards with limited-energy circuits (9.4)		N/A
14.8	Circuits or components used as TRANSIENT OVERVOLTAGE limiting devices		N/A
	Test conducted between each pair of MAINS SUPPLY TERMINALS		N/A
	No HAZARD resulting from rupture or overheating of the component:		N/A
	- no bridging of safety relevant insulation		N/A
	- no heat to other parts above the self-ignition points		N/A
14.101	<i>Circuits or components used as TRANSIENT OVERVOLTAGE limiting devices in measuring circuits used to measure MAINS</i>		N/A
15	PROTECTION BY INTERLOCKS		N/A

EN 61010-1 / EN 61010-2-030			
Clause	Requirement + Test	Result - Remark	Verdict
15.1	Interlocks are designed to remove a HAZARD before OPERATOR exposed	No interlock	N/A
15.2	Prevention of reactivation		N/A
15.3	Reliability		N/A
16	HAZARDS RESULTING FROM APPLICATION		P
16.1	REASONABLY FORESEEABLE MISUSE		P
	No HAZARDS arising from settings not intended and not described in the instructions		P
	Other cases of REASONABLY FORESEEABLE MISUSE addressed by RISK assessment		N/A
16.2	Ergonomic aspects		N/A
17	RISK ASSESSMENT		N/A
	Risk assessment conducted, if HAZARD might arise and not covered by Clauses 6 to 16	No hazard occurred during the tests of clause 6 to 16	N/A
101	<i>Measuring circuits</i>		P
101.1	<i>The equipment shall provide protection against HAZARDS resulting from NORMAL USE and REASONABLY FORESEEABLE MISUSE of measuring circuits,</i>		P
	<i>a) a current measuring circuit shall not interrupt the circuit being measured during range changing, or during the use of current transformers without internal protection</i>		N/A
	<i>b) An electrical quantity that is within specification for any TERMINAL shall not cause a HAZARD when it is applied to that TERMINAL or any other compatible TERMINAL, with the range and function settings set in any possible manner</i>		P
	<i>c) Any interconnection between the equipment and other devices or accessories shall not cause a HAZARD even if the documentation or markings prohibit the interconnection while the equipment is used for measurement purposes</i>		P
	<i>d) For measuring circuits that include one or more FUNCTIONAL EARTH TERMINALS</i>		N/A
	<i>e) Other HAZARDS that could result from REASONABLY FORESEEABLE MISUSE shall be addressed by RISK assessment</i>		N/A
101.2	<i>Current measuring circuits</i>	No current measuring circuit	N/A
	<i>Current measuring circuits shall be so designed that, when range changing takes place, there shall be no interruption which could cause a HAZARD</i>		N/A

EN 61010-1 / EN 61010-2-030			
Clause	Requirement + Test	Result - Remark	Verdict
	<i>Current measuring circuits intended for connection to current transformers without internal protection shall be adequately protected to prevent a HAZARD arising from interruption of these circuits during operation</i>		N/A
101.3	<i>Protection against mismatches of inputs and ranges</i>		P
103.1	<i>In NORMAL CONDITION and in cases of REASONABLY FORESEEABLE MISUSE, no HAZARD shall arise when the maximum RATED voltage or current of a measuring TERMINAL is applied to any other compatible TERMINAL, with any combination of function and range settings</i>		P
101.3.2	<i>Protection by a certified overcurrent protection device</i>		N/A
101.3.3	<i>Protection by uncertified current limitation devices or by impedances</i>		P
101.3.4	<i>Test leads for the tests of 101.3.2 and 101.3.3</i>		P
ANNEX F	ROUTINE TESTS		N/A
	Manufacturer 's declaration	Not checked	N/A

EN 61010-1/EN61010-2-030			
Clause	Requirement — Test	Result — Remark	Verdict

6.7	TABLE: Insulation requirements- Block diagram of system	Form A.14	P
------------	--	------------------	----------

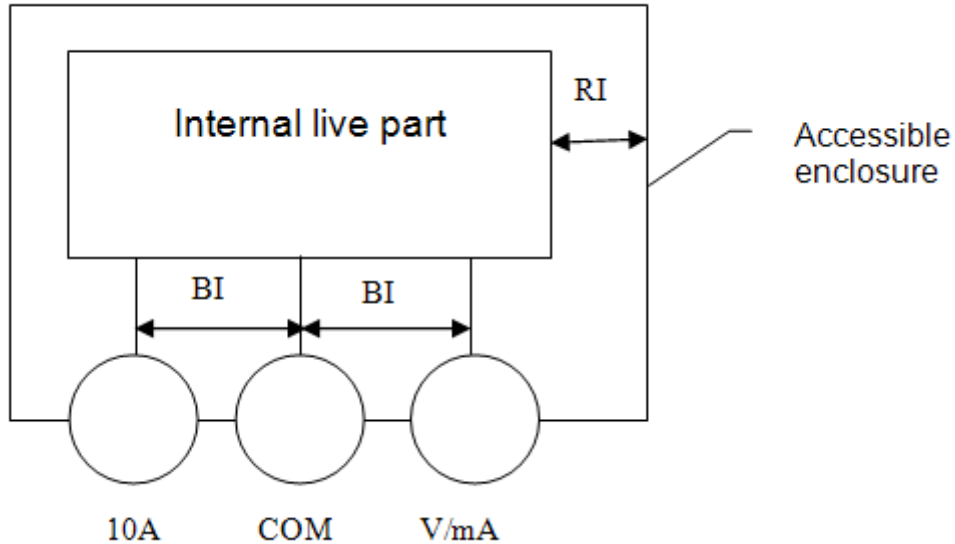

Pollution degree : 2	Measurement category :
----------------------------	------------------------------

Area	Location	Insulation type (NOTE 1)	WORKING VOLTAGE			Test voltage (NOTE 2) V r.m.s.	Comments (NOTE 3)
			RMS V	Peak V	Frequency kHz		
A	Internal live part from PCB to accessible enclosure	RI	250	-	-	3000	1min, PASS
B	Internal live part from soft button to accessible enclosure	RI	250	-	-	3000	1min, PASS
C	Internal live part from LCD display to accessible enclosure	RI	250	-	-	3000	1min, PASS
D	Internal live part from switch to accessible enclosure	RI	250	-	-	3000	1min, PASS
E	COM to V/mA terminal	BI	250	-	-	1500	1min, PASS
F	COM to 10A Terminal	BI	250	-	-	1500	1min, PASS

NOTE 1 – Type of insulation:
 BI = BASIC INSULATION
 DI = DOUBLE INSULATION
 PI = PROTECTIVE IMPEDANCE
 RI = Reinforced INSULATION
 SI = Supplementary INSULATION
 see also Form A.15 for further details

COM to V/mA terminal
 COM to 10A Terminal

r.m.s.
 d.c.
 peak

NOTE 3 - OVERVOLTAGE CATEGORIES or POLLUTION DEGREES which differ should be shown under "Comments"

Supplementary Information:

EN 61010-1/EN61010-2-030			
Clause	Requirement — Test	Result — Remark	Verdict

6.7	TABLE: Insulation requirements- Clearances and Creepages	Form A.15	P
6.2.2	Examination	6.5.4 Protective impedance	—
6.4.2	ENCLOSURES and protective barriers	6.5.6 Current- or voltage-limiting device	—
6.4.4	Impedance		—

Area	Location	Insulation type (NOTE 1)	WORKING VOLTAGE (NOTE 2)			Clearance		Creepage		CTI	Verdict	Comments
			RMS V	Peak V	Frequency kHz	Required mm	Measured mm	Required mm	Measured mm			
	(See Form A.14)											
A	Internal live part from PCB to accessible enclosure	RI	250	-	-	3	10.9	5	10.9	600 ≤ CTI	P	
B	Internal live part from soft button to accessible enclosure	RI	250	-	-	3	8.6	5	8.6	600 ≤ CTI	P	
C	Internal live part from LCD display to accessible enclosure	RI	250	-	-	3	7.3	5	7.3	175 ≤ CTI < 400	P	
D	Internal live part from switch to accessible enclosure	RI	250	-	-	3	8.1	5	8.1	600 ≤ CTI	P	
E	Internal live part from battery compartment to accessible enclosure	RI	250	-	-	3	8.1	5	8.1	600 ≤ CTI	P	
F	COM to V/mA terminal	BI	250	-	-	1.5	4.5	1.5	4.5	175 ≤ CTI < 400	P	
G	COM to 10A Terminal	BI	250	-	-	1.5	4.5	1.5	4.5	175 ≤ CTI < 400	P	
H	Internal live part from screw to accessible enclosure	RI	250	-	-	3	9.2	5	9.2	600 ≤ CTI	P	

NOTE 1 – refer to Form A.14 for type of insulation shown in the insulation diagram NOTE 2 - to be used for definition of required insulation (see Form A.14)

Input supply voltage.....:	V	Hz
----------------------------	---	----

EN 61010-1/EN61010-2-030												
Clause	Requirement — Test					Result — Remark					Verdict	
6.7	TABLE: Insulation requirements- Clearances and Creepages										Form A.15	P
6.2.2	Examination					6.5.4	Protective impedance					—
6.4.2	ENCLOSURES and protective barriers					6.5.6	Current- or voltage-limiting device					—
6.4.4	Impedance											—
Area	Location	Insulation type	WORKING VOLTAGE (NOTE 2)			Clearance		Creepage		CTI	Verdict	Comments
	(See Form A.14)	(NOTE 1)	RMS V	Peak V	Frequency kHz	Required mm	Measured mm	Required mm	Measured mm			
Supplementary information: CAT II 250V, limit: CL=1.5mm(BI), 3.0mm(RI) CR=1.5mm,(BI) 5.0mm(RI)												

EN 61010-1/EN61010-2-030						
Clause	Requirement — Test	Result — Remark			Verdict	
10.	TABLE : Temperature Measurements				Form A.27A	P
10.1	Surface temperature limits - NORMAL CONDITION and / or SINGLE FAULT CONDITION				P	
10.2	Temperature of windings- NORMAL CONDITION and / or SINGLE FAULT CONDITION				P	
10.3	Other temperature measurements				P	
Operating conditions:	See below descriptions					
Frequency	- Hz	Test room ambient temperature (ta)...	- °C			
Voltage	-- V	Test duration.....	- h - min			
Part / Location	dT K	t_c °C	t_{max} °C	Verdict t	Comments	
Single fault condition: Load 10A continuance.						
Test ambient temperature: 26°C						
Test duration: 2h 13 min						
Remark: no hazards.						
PCB near 10A fuse	93.5	133.5	-	P	For reference	
Accessible enclosure near to10A terminal	38.2	78.2	105	P		
LCD display	6.9	46.9	105	P		
Accessible adjust to battery	6.1	46.1	105	P		
NOTE 1 - t_m = measured temperature t_c = t_m corrected ($t_m - t_a + 40$ °C or max. RATED ambient) t_{max} = maximum permitted temperature NOTE 2 - see also 14.1 with reference to component operating conditions NOTE 3 - Record values for NORMAL CONDITION and / or SINGLE FAULT CONDITION in this Form use additional form if necessary NOTE 4 - see Form A.21B for details of winding temperature measurements						
Supplementary information:						

EN 61010-1/EN61010-2-030						
Clause	Requirement — Test	Result — Remark				Verdict
TABLE: 1 - List of components and circuits relied on for safety						P
Unique component reference or location	Application/function	Manufacturer / trademark (NOTE 1)	Type / model	Technical data (NOTE 2)	Standard	Mark(s) of conformity evidence of acceptance (NOTE 3 and 4)
PCB	--	SHENZHEN HUA YAN HUI HAI ELECTRONIC CO LTD	HD	94V-0, RTI:130°C	ANSI/UL 94	UL and tested in appliance UL E237212
Alternative	--	HANG LUEN ELECTRONIC CO	HL-202	94V-0, RTI:130°C	ANSI/UL 94	UL and tested in appliance UL E225875
Alternative	--	Various	Various	94V-0, RTI:130°C	ANSI/UL 94	UL and tested in appliance
Enclosure	--	LG Chemical Ltd	AF-312	ABS flammability class: 94V-0, RTI:85°C, Material group II	EN 61010-1: 2010 UL 94	UL and tested in appliance UL 248280
Alternative	--	Chi Mei Corporation	PA-765A (+)	ABS flammability class: 94V-0, RTI:85°C, Material group II	EN 61010-1: 2010 UL 94	UL and tested in appliance UL E56070
Plastic Enclosure (Transp Cover)	--	SABIC INNOVATIVE PLASTICS US L L C	940A	V-0,130°C, PC, Material Group IIIa	UL 1414	UL and tested in appliance UL E121562
FuseF1 0.2A/250V	--	Dongguan Reomax Electronics Technology Co Ltd	BFC	Φ 5.2*20, 200mA,250V Breaking capacity:10KA	ANSI/UL 248-1, ANSI/UL 248-14	UL and tested in appliance UL E340427

EN 61010-1/EN61010-2-030			
Clause	Requirement — Test	Result — Remark	Verdict

TABLE: 1 - List of components and circuits relied on for safety							P
Unique component reference or location	Application/function	Manufacturer / trademark (NOTE 1)	Type / model	Technical data (NOTE 2)	Standard	Mark(s) of conformity evidence of acceptance (NOTE 3 and 4)	
Alternative	--	Conquer Electronics Co Ltd	UBM	Φ 5.2*20, 200mA,250V Breaking capacity:10KA	ANSI/UL 248-1, ANSI/UL 248-14	UL and tested in appliance UL E82636	
Alternative	--	Hollyland co.Ltd	50CT	Φ 5.2*20, 200mA,250V Breaking capacity:10KA	ANSI/UL 248-1, ANSI/UL 248-14	UL and tested in appliance UL E156471	
FuseF2 10A/250V	--	Dongguan Reomax Electronics Technology Co Ltd	BFC	Φ 5.2*20, 10A,250V Breaking capacity:10KA	ANSI/UL 248-1, ANSI/UL 248-14	UL and tested in appliance UL E340427	
Alternative	--	Hollyland co.Ltd	50CT	Φ 5.2*20, 10A,250V Breaking capacity:10KA	ANSI/UL 248-1, ANSI/UL 248-14	UL and tested in appliance UL E156471	
NOTE → 1 List all different manufacturers of the above components → 4 asterisk indicates mark assuring agreed level of surveillance → 2 May include electrical, mechanical values → 3 List licence no or method of acceptance							

Appendix 1- product photos



Photo 1 –Front view of UT131A



Photo 2 –Front view of UT131B

Appendix 1- product photos



Photo 3 –Front view of UT131C



Appendix 1- product photos

Photo 4 – Front view of UT131D



Photo 5 – Rear view with case



Photo 6 –Rear view without case1

Appendix 1- product photos



Photo 7 –Rear view without case2



Photo 8 – Battery compartment view

Appendix 1- product photos



Photo 9 – Internal view of UT131A



Photo 10 – PCB bottom view of UT131A

Appendix 1- product photos



Photo 15- Internal view of UT131D



Photo 16- PCB bottom view of UT131D