


DMT10600C101_06WT

10.1 Inches, 1024xRGBx600, 65K Colors, DGUS LCM (DGUS II)

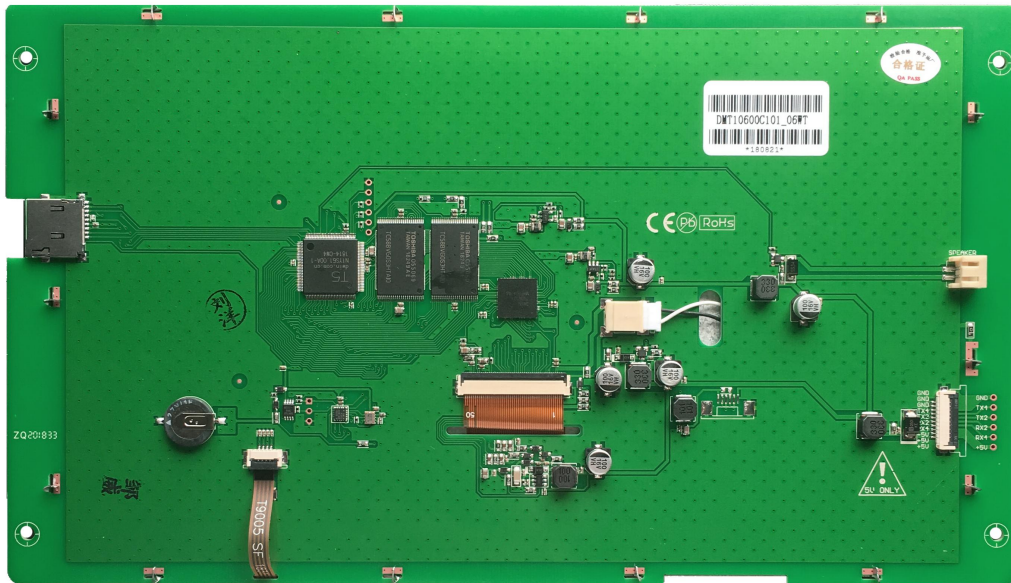

Record of Revision

Revise Date	Content
2018-04-02	First Edition
2018-08-23	Update Pictures
2018-09-03	Modify dimensional drawing (Stainless steel frame dimension)

● Display

Item	Parameter	Description
Color	65K (65536) colors	16 bit color 5R6G5B
Active Area (A.A.)	222.7mm (W) × 125.3mm (H)	1024*600
View Area (V.A.)	225.0mm (W) × 127.2mm (H)	1024*600
Resolution	1024*600	Support 0° /90° /180° /270° rotated display
Backlight	LED	≥10000H (Continuous working with maximum brightness, time of brightness halves)
Brightness	250 nit	100 levels adjustment(It's not recommend to set brightness to 1%~30% of the maximum,which may lead a flicker)
Panel Type	-	IPS

● Voltage & Current

Item	Conditions	Min	Typ	Max	Unit
Power Voltage	-	4.5	5.0	5.5	V
Operation Current	VCC = +5V, Backlight on	-	550	-	mA
	VCC = +5V, Backlight off	-	180	-	mA
Recommended power supply: 5V 1A DC					

● Reliability Test

Item	Conditions	Min	Typ	Max	Unit
Working Temperature	60%RH at 5V voltage	-20	25	70	°C
Storage Temperature	-	-30	25	85	°C
Working Humidity	25°C	10%	60%	90%	RH
Protective Paint	-	-	None	-	-
Aging Test	-	-	None	-	H

● Interface

Item	Conditions	Min	Typ	Max	Unit
Baudrate	User Set	7841	115200	7833600	bps
Output Voltage (TXD)	Output 1, Iout = 1mA	3.0	3.3	-	V
	Output 0, Iout = -1mA	-	0	0.3	V
Input Voltage (RXD)	Input 1, Iin = 1mA	2.4	3.3	5.0	V
	Input 0, Iin = -1mA	0	-	0.5	V
Interface	UART2: N81, 3.3V TTL/CMOS UART4: Optional N81/E81/O81/N82 mode, 3.3V TTL/CMOS				
Socket	10Pin_1.0mm FCC				
SD Slot	Yes (SD/SDHC, FAT32 file format)				
Speaker	2PIN_2.0mm				

● Memory

Item	Parameter	Min	Typ	Max	Unit
Flash	Space of Font	-	-	64	MB
	Font and audio file share the back half (32 Mbytes) of Font Space.				
	Picture Storage (256MB)	-	-	147	Pcs
RAM	Variable Storage Space	-	128	-	Kbytes
Nor Flash	User database	-	320	-	Kbytes

● UI&Peripherals




Peripherals Acquired	
UI Vesion	T5UID2
Peripherals	Resistance touch screen,Speaker

● Packing Capacity & Dimension

Dimension				
Dimension	257.8 (W) × 148.1(H) × 14.9(T)mm			
Net Weight	470g			
Packing Capacity				
Model	Size	Layer	Quantity/Layer	Quantity(Pcs)
Carton1	220mm(L)×160mm(W)×47mm(H)	-	-	-
Carton2	250mm(L)×200mm(W)×80mm(H)	2	1	2
Carton3	320mm(L)×270mm(W)×80mm(H)	-	-	-
Carton4	450mm(L)×350mm(W)×300mm(H)	1	10	10
Carton5	600mm(L)×450mm(W)×300mm(H)	-	-	-

Remark:There is no extra-notice if the product design changes that do not affect performance parameters and use

引脚名称	引脚定义	引脚类型	说明
GND	8, 9, 10	P	公共接地/GND
TX4	7	0	通文屏串口4输出DOUT
TX2	6	0	通文屏串口2输出DOUT
RX2	5	I	通文屏串口2输入DIN
RX4	4	I	通文屏串口4输入DIN
+5V	1, 2, 3	P	电源输入/Power Input

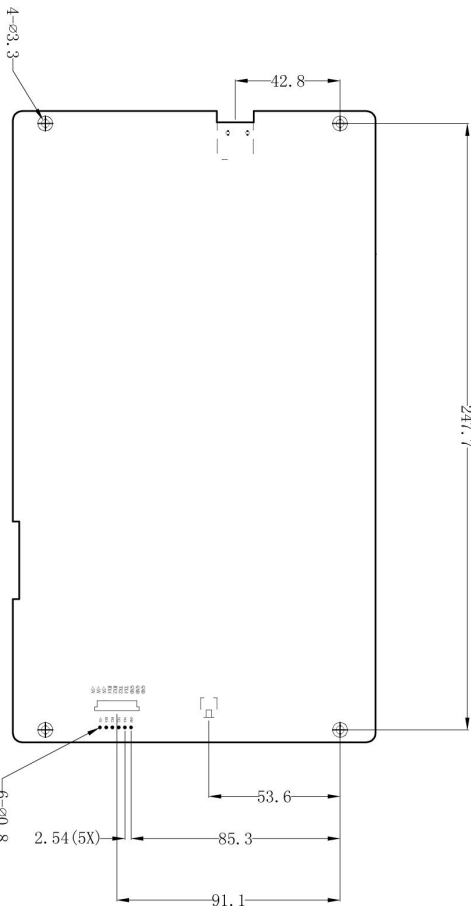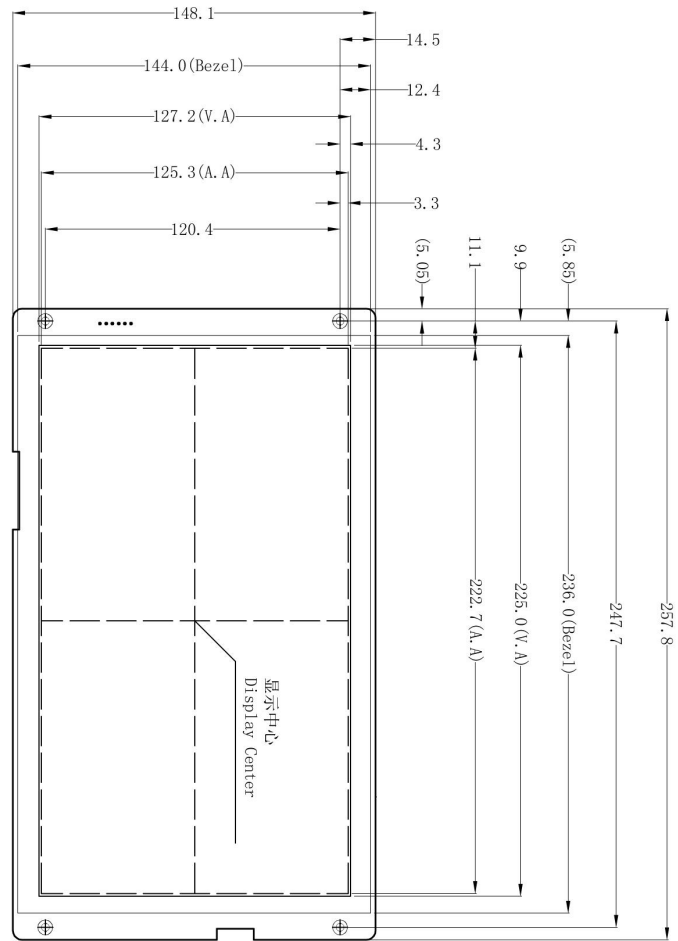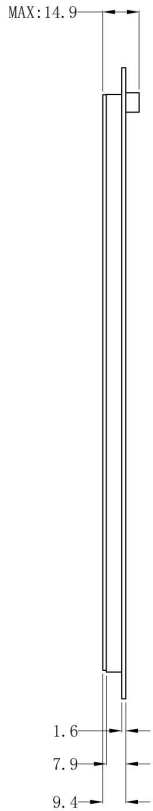

1. 尺寸定位基准为定位孔
Location hole is used as position reference.

2. 未标注公差为 $\pm 0.3\text{mm}$

Unmarked Tolerance is $\pm 0.3\text{mm}$

注: 虚线标注为有效显示区域

Active area is marked in Dash lines

型号	DMT10600C101_06WT			北京迪文科技 Beijing DWIN Technology Co., Ltd.	
图 纸	A 4	图 纸	DWIN	日期	
比 例		审 核		日期	
单 位	MM	批 准		日期	