


# SRXXX-P

10W~200W

## PRODUCT SPECIFICATION

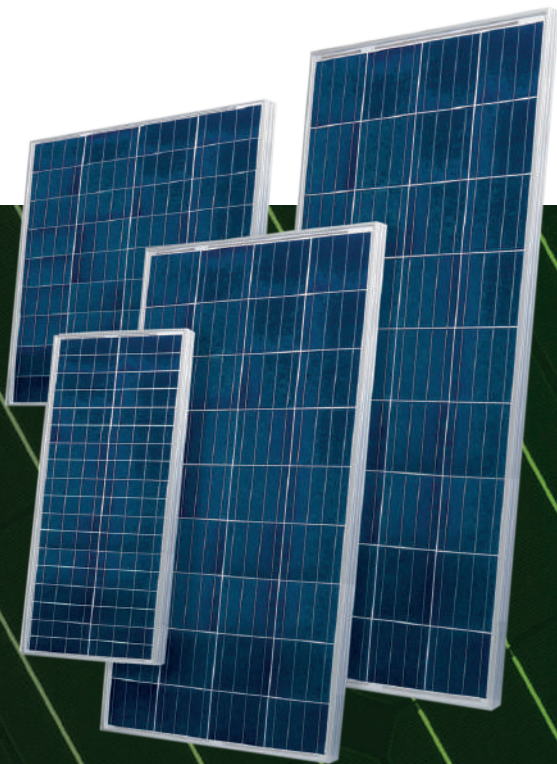

- Industry leading module power output warranty
- International quality, safety and performance certifications
- Manufacturing facility certified to ISO9001 quality management system standards
- Beautiful appearance, good durability & easy installation
- Special design in accordance with requirements of customers




## WARRANTIES

10 years for product defects in materials & workmanship

10 years for 90% of warranted minimum power output

25 years for 80% of warranted minimum power output

25 years linear warranty

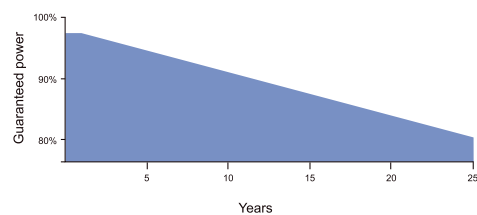

QUALITY DESIGN | GREAT DURABILITY | EASY INSTALLATION

## PRODUCT SPECIFICATION

<b>Model Type</b>	<b>10W</b>	<b>20W</b>	<b>50W</b>
Peak Power (Pmax)	10W	20W	50W
Maximum Power Voltage (Vmp)	17.4V	17.4V	18.2V
Maximum Power Current (Imp)	0.58A	1.15A	2.75A
Short Circuit Current (Isc)	0.63A	1.23A	2.91A
Open Circuit Voltage (Voc)	22.4V	22.4V	22.3V
Weight (Kg)	1.25KG	1.95KG	4.5KG
Dimensions (mm)	300 x 350 x 25	490 x 350 x 25	700 x 510 x 30
Maximum System Voltage		700V DC	
Temp. Coeff. of Isc (TK Isc)		0.045% / °C	
Temp. Coeff. of Voc (TK Voc)		-0.34% / °C	
Temp. Coeff. of Pmax (TK Isc)		-0.47% / °C	
Normal Operating Cell Temperature		45±2°C	
Tolerance		±3%	

<b>Model Type</b>	<b>60W</b>	<b>80W</b>	<b>100W</b>
Peak Power (Pmax)	60W	80W	100W
Maximum Power Voltage (Vmp)	17.46V	18.5V	18.2V
Maximum Power Current (Imp)	3.44A	4.32A	5.49A
Short Circuit Current (Isc)	3.68A	4.58A	5.82A
Open Circuit Voltage (Voc)	21.8V	22.6V	22.3V
Weight (Kg)	6KG	5.9KG	7.7KG
Dimensions (mm)	620 x 670 x 30	780 x 670 x 30	1020 x 670 x 30
Maximum System Voltage		1000V DC	
Temp. Coeff. of Isc (TK Isc)		0.045% / °C	
Temp. Coeff. of Voc (TK Voc)		-0.34% / °C	
Temp. Coeff. of Pmax (TK Isc)		-0.47% / °C	
Normal Operating Cell Temperature		45±2°C	
Tolerance		±3%	

<b>Model Type</b>	<b>120W</b>	<b>150W</b>	<b>200W</b>
Peak Power (Pmax)	120W	150W	200W
Maximum Power Voltage (Vmp)	17.46V	17.46V	17.46V
Maximum Power Current (Imp)	6.88A	8.6A	11.46A
Short Circuit Current (Isc)	7.36A	9.2A	12.25A
Open Circuit Voltage (Voc)	21.8V	21.8V	21.8V
Weight (Kg)	9KG	11KG	14.5KG
Dimensions (mm)	1205 x 670 x 3	1480 x 670 x 35	1320 x 992 x 35
Maximum System Voltage		1000V DC	
Temp. Coeff. of Isc (TK Isc)		0.045% / °C	
Temp. Coeff. of Voc (TK Voc)		-0.34% / °C	
Temp. Coeff. of Pmax (TK Isc)		-0.47% / °C	
Normal Operating Cell Temperature		45±2°C	
Tolerance		±3%	